




**EPP - 20**  
**EPP - 40**

# Self-Contained Emergency Lighting




**Emergency Power Pack Module for  
Fluorescent lamp 20W/40W**

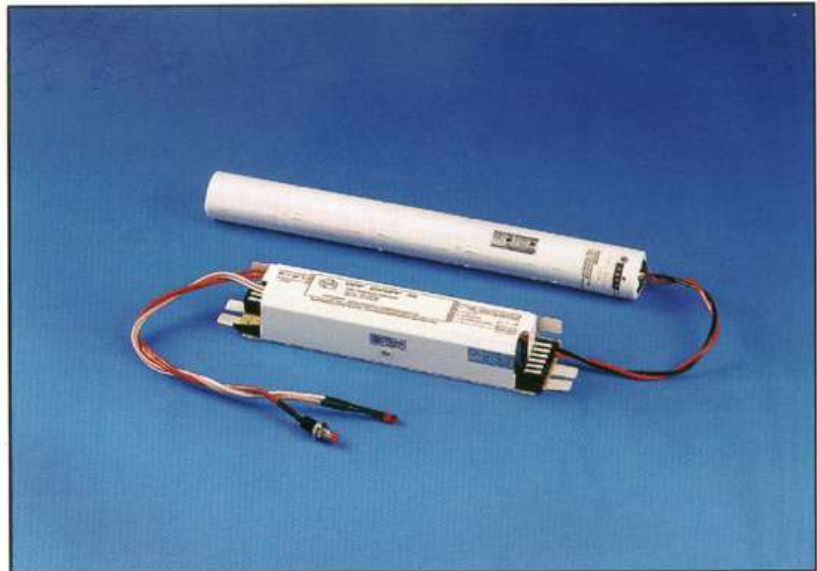

## Specifications


<b>MODEL</b> .....	• • • • •	➔	EPP-20 / EPP-40
<b>MODE</b> .....	• • • • •	➔	Maintained / Non-maintained
<b>WEIGHT</b> .....	• • • • •	➔	0.8 kg (EPP-20) 1.2 kg (EPP-40)
<b>BATTERY</b> .....	• • • • •	➔	High temperature rated sealed Nickel-cadmium battery
<b>CHARGER</b> .....	• • • • •	➔	Constant current Dual rate or Charger (optional)
<b>MONITORING</b> .....	• • • • •	➔	Red LED indicating for supply healthy and charging is on
<b>COMPLIANCE</b> .....	• • • • •	➔	SIRIM MS 619 Built to SSCP19 & Australia Standard (AS2293) Part 1
<b>LIGHT SOURCE</b> .....	• • • • •	➔	For use with Fluorescent tube 1 x 20W / 1 x 40W
<b>INPUT VOLTAGE</b> .....	• • • • •	➔	240V +/- 10% 50/60 Hz
<b>RECHARGE PERIOD</b> .....	• • • • •	➔	20 - 24 Hours
<b>BACK-UP DURATION</b> .....	• • • • •	➔	3 Hours
<b>BATTERY PROTECTION</b> .....	• • • • •	➔	Low voltage cut-off to prevent battery from over discharging
<b>POWER CONSUMPTION</b> .....	• • • • •	➔	< 10VA
<b>OPERATING TEMPERATURE</b> .....	• • • • •	➔	ta 0°C to 65°C

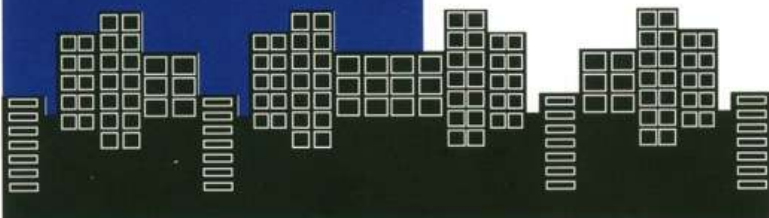


For further enquiries, please contact :  
**PNE SYSTEMS SDN. BHD.** (263861 D)  
No. 3, Jalan SS 26/13,  
Taman Mayang Jaya, 47301 Petaling Jaya,  
Selangor Darul Ehsan, Malaysia.  
Tel : 03-7803 7488 (Hunting)  
Fax: 03-7803 8509  
E-mail: pnesys@po.jaring.my

*Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.*

## SET UP CONNECTION FOR EPP20 / EPP40

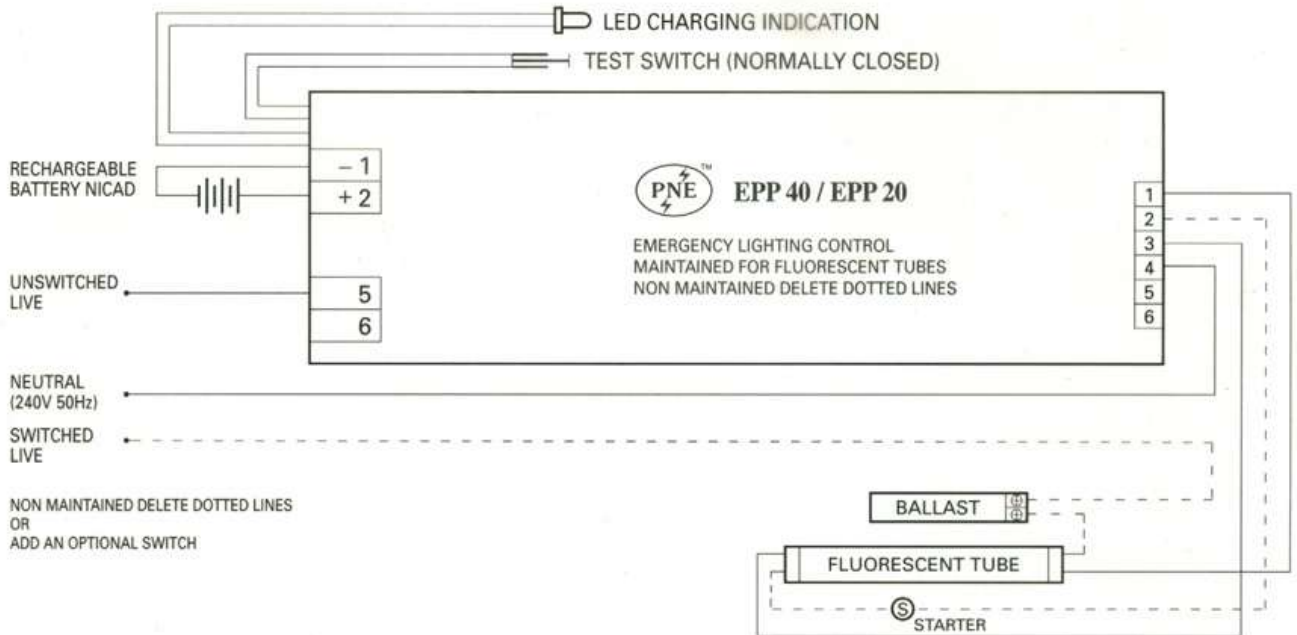

## CIRCUIT FOR 2 x 18W IN SERIES USING EPP 20

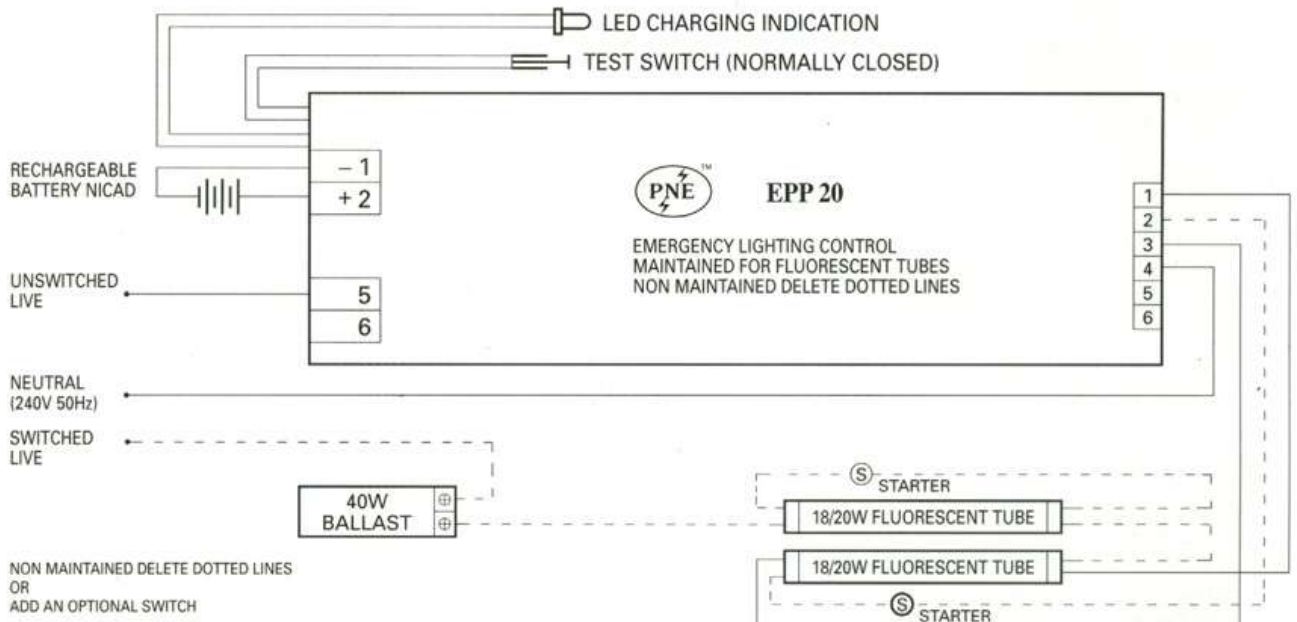

For further enquiries, please contact :

**PNE SYSTEMS SDN. BHD.** (263861 D)

No. 3, Jalan SS 26/13,

Taman Mayang Jaya, 47301 Petaling Jaya,  
Selangor Darul Ehsan, Malaysia.

Tel : 03-7803 7488 (Hunting)

Fax: 03-7803 8509

E-mail: pnesys@po.jaring.my

Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.

