



PEL - 13


Self-Contained Emergency Lighting



1 x 13w Self-contained Emergency Fluorescent Luminaire



PEL - 13
Surface Mounting

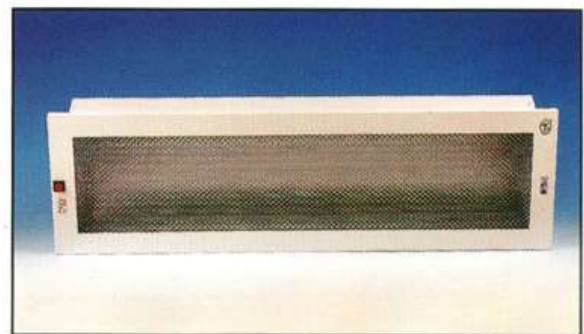

PEL - 13
Recessed Mounting

Specifications

MODEL	PEL-13
MODE	Non-maintained
WEIGHT	1.9 kg
BATTERY	High temperature rated sealed Nickel-cadmium battery
HOUSING	Electro-galvanised sheet steel with powder coated paint
CHARGER	Constant Current
MOUNTING	Surface mounting direct to wall or ceiling / Recessed mounting
DIMENSION	Surface : 546mm (L) x 105mm (W) x 79mm (H) Recessed : 610mm (L) x 185mm (W) x 100mm (H)
MONITORING	Red LED indicators for supply healthy and charging is on
COMPLIANCE	SIRIM MS 619
LIGHT SOURCE	1 x 13w Fluorescent Tube
INPUT VOLTAGE	240V +/- 10% 50 Hz.
RECHARGE PERIOD	16 - 24 Hours
BACK-UP DURATION	3 Hours
BATTERY PROTECTION	Low voltage cut-off to prevent battery from over discharging
POWER CONSUMPTION	< 10VA
DEGREE OF PROTECTION	IP-20
OPERATING TEMPERATURE	0°C to 65°C
SPECIAL FEATURES	Low voltage mains detection comply to MS 619



For further enquiries, please contact :

PNE SYSTEMS SDN. BHD. (263861-D)
No. 3, Jalan SS26/13,
47301 Petaling Jaya, Selangor.
Tel : (6)03-7803 7488
Fax : (6)03-7803 8509

Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.

MODEL : PEL-13

1 x 13W Self-contained Emergency Fluorescent Luminaire

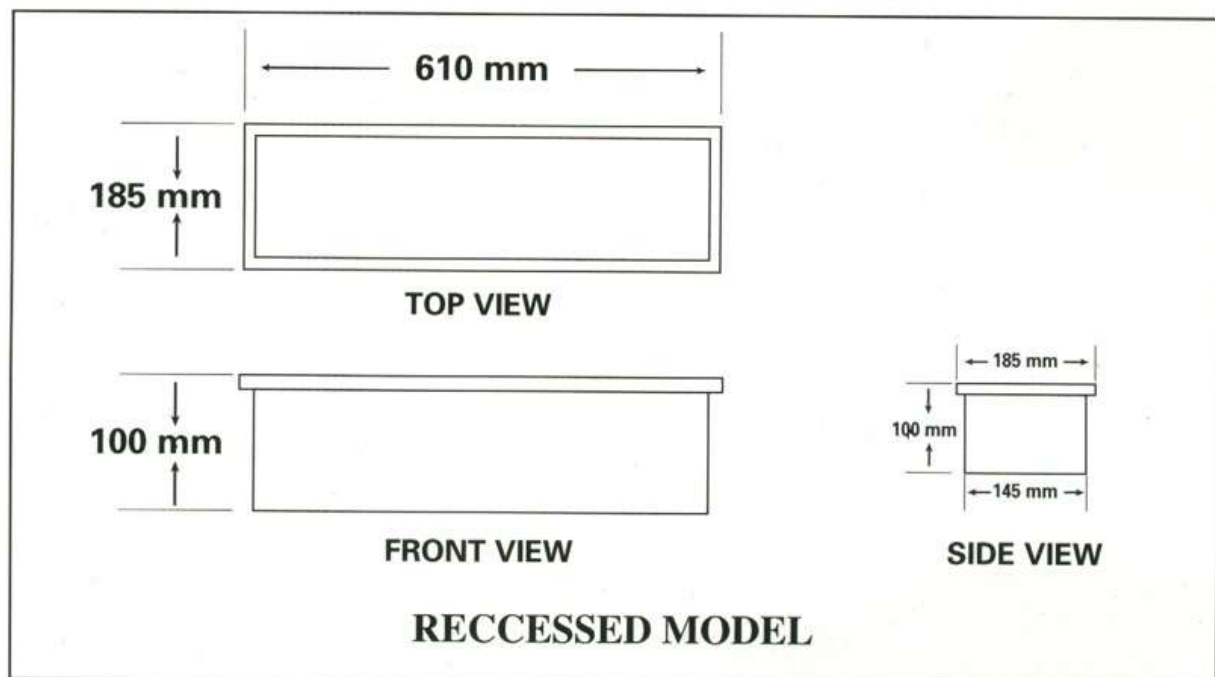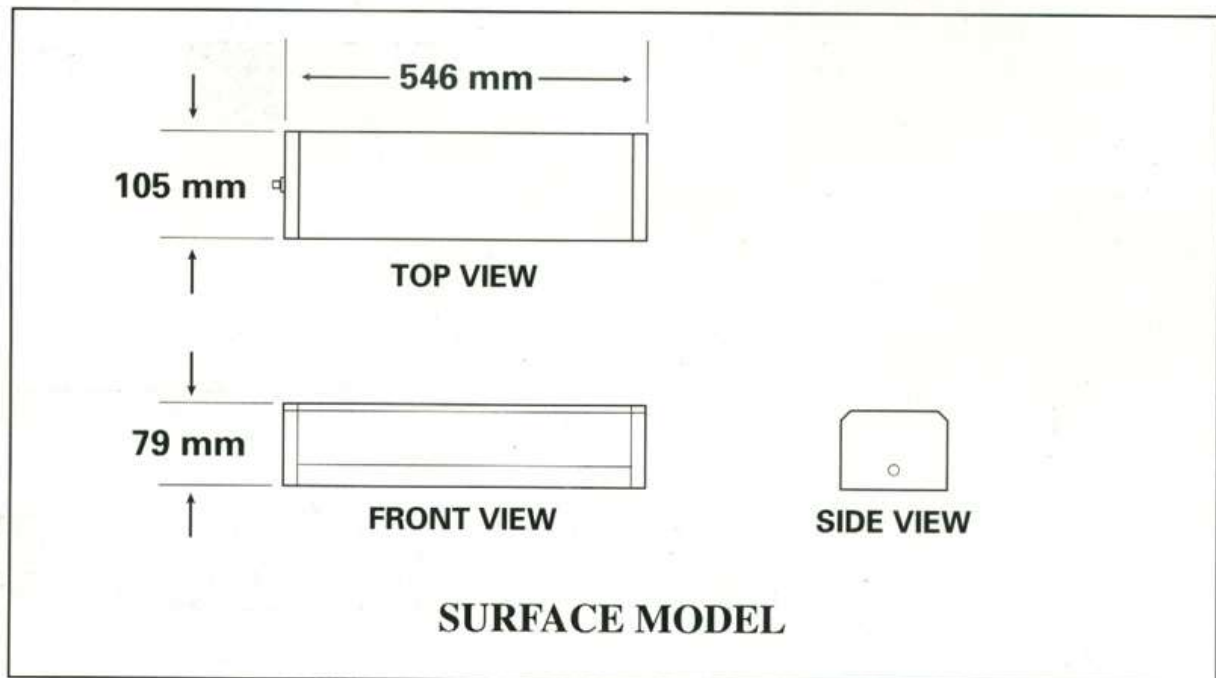

For further enquiries, please contact :

PNE SYSTEMS SDN. BHD. (263861-D)

No. 3, Jalan SS26/13,
47301 Petaling Jaya, Selangor D. E.

Tel: (6)03-7803 7488 Fax: (6)03-7803 8509

Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.