




Self-Contained Emergency Lighting




PTH-110

(Emergency tungsten halogen downlighter)

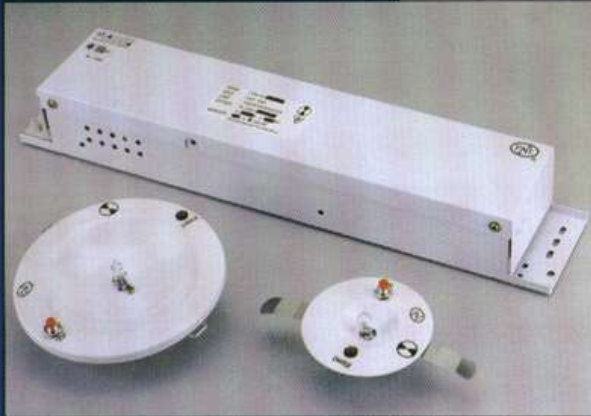

PPL-111 / PPL-111(S)

(Emergency power pack for compact fluorescent lamps)

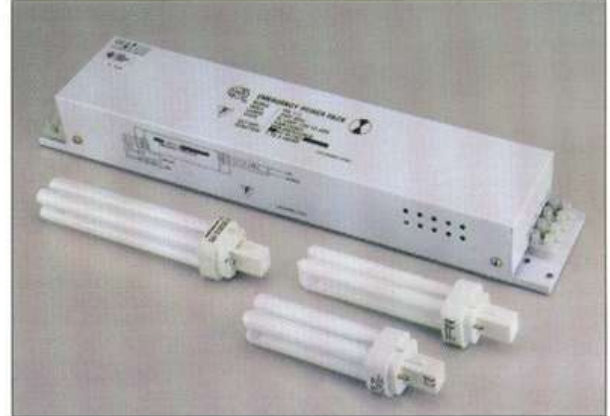

Specifications


MODEL	PTH - 110	PPL - 111/PPL - 111 (S)	
MODE	Non-maintained	Maintained or non-maintained	
WEIGHT	1.8 kg		
BATTERY	High-temperature rated sealed nickel-cadmium		
CHARGER	Constant current		
DURATION	3 Hours	2 -3 Hours	
STANDARD	SIRIM MS 619 : PT.102 : SEC.102.22 : 1985 (P)		
MOUNTING	Ceiling recess mounted		
DIMENSION	393 (L) X 75 (W) X 55 (H)		
LIGHT SOURCE	6V/10W low voltage tungsten halogen lamp	PPL - 111 (13 -18W)	PPL - 111(S) (9 -11W)
INPUT VOLTAGE	240V 50Hz		
SAFETY FEATURE	Low voltage cut-off to protect and prolong battery		
POWER CONSUMPTION	< 10 VA		
OPERATING TEMPERATURE	0 - 65 degrees Celcius		

For further enquiries, please contact :
PNE SYSTEMS SDN. BHD. (263861 D)
 No. 3, Jalan SS 26/13,
 Taman Mayang Jaya, 47301 Petaling Jaya,
 Selangor Darul Ehsan, Malaysia.
 Tel : 03-7803 7488 (Hunting)
 Fax: 03-7803 8509
 E-mail: sales@pnesys.com.my

Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.


MODEL PTH-110

Emergency Tungsten Halogen Downlighter

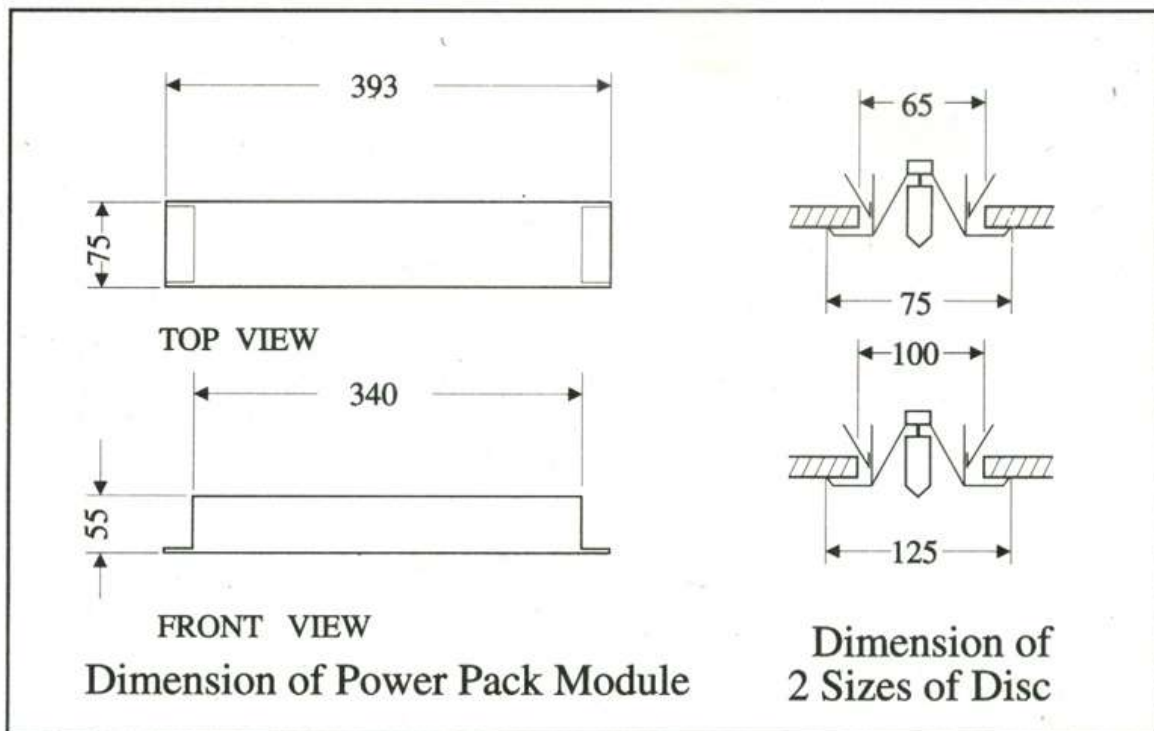

MODEL PPL-111

Dimension For Compact Fluorescent Lamps

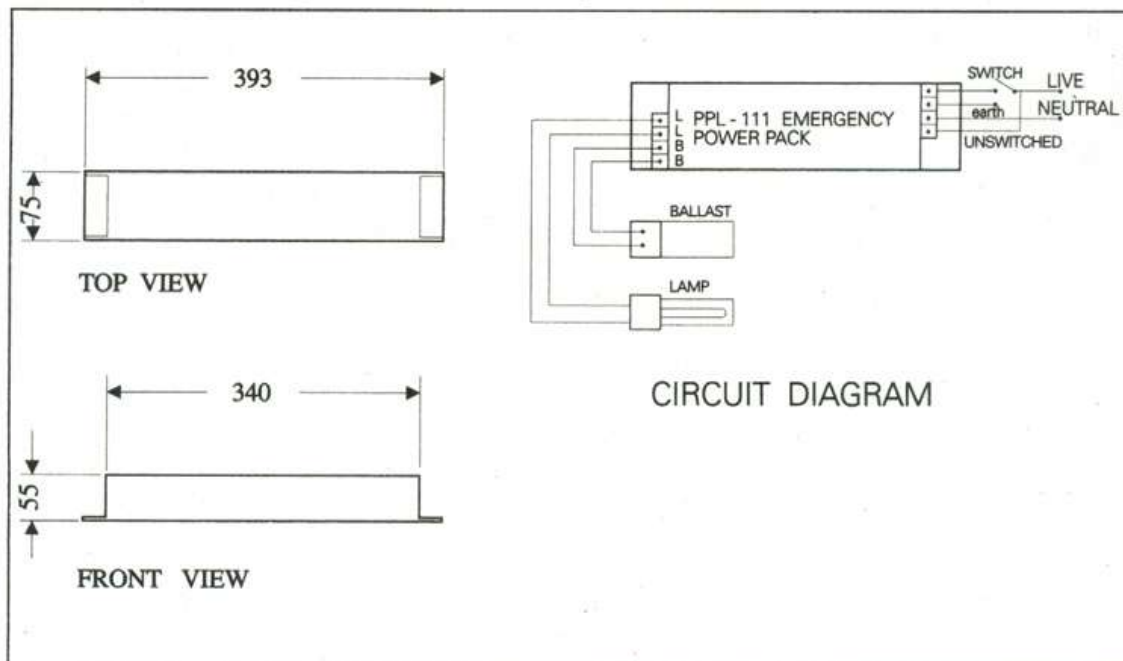

For further enquiries, please contact :

PNE SYSTEMS SDN. BHD. (263861 D)

No. 3, Jalan SS 26/13,

Taman Mayang Jaya, 47301 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.

Tel : 03-7803 7488 (Hunting)

Fax: 03-7803 8509

E-mail: sales@pnesys.com.my



Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.