



Self-Contained Emergency KELUAR Sign

PEX-215 2 x 15 w (Incandescent Bulbs)

PEX-215F 2 x 8w (Fluorescent Tube)

PEX-215LED (Super Bright Light Emitting Diodes)



PEX 215LED



Specifications

Model	PEX - 215 (2x15W)	PEX - 215F (2x8W)	PEX - 215LED
Mode	Sustained		Maintained
Weight	2.3 Kgs	2.5 Kgs	1.3 Kgs
Battery	3 x 1.2V Ni-Cad		2 x 1.2V Ni-Cad
Housing	Electro-galvanised sheet steel with powder coated paint		
Charger	Constant Current		
Mounting	Surface mounting direct to wall or ceiling		
Dimension	600 L x 60 W x 195 H		
Monitoring	Red LED indicating healthy supply and charging		
Compliance	SIRIM MS, 983 (2000), Jabatan Bomba, JKR		
Light Source			
Mains 'ON'	2 x 15W AC bulb	1 x 8W Tube	LED
Mains 'OFF'	3 x 1.2W DC bulb	1 x 8W Tube	LED
Input Voltage	240 V +/- 10% 50/60 Hz		
Recharge Period	16 - 24 Hours		
Back Up Duration	3 Hours		
Power Consumption	< 20 VA		< 5 VA
Degree of Protection	IP - 20		
Operating Temperature	0 °C to 65 °C		


For further enquiries, please contact:

PNE SYSTEMS SDN. BHD. (263861 D)

No. 3, Jalan SS26/13,
Taman Mayang Jaya, 47301 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.
Tel : 03-7803 7488 (Hunting)
Fax : 03-7803 8509
E-mail : pnesys@po.jaring.my

MODEL PEX-215 / PEX-215F / PEX-215LED

Self-Contained Emergency Keluar Sign

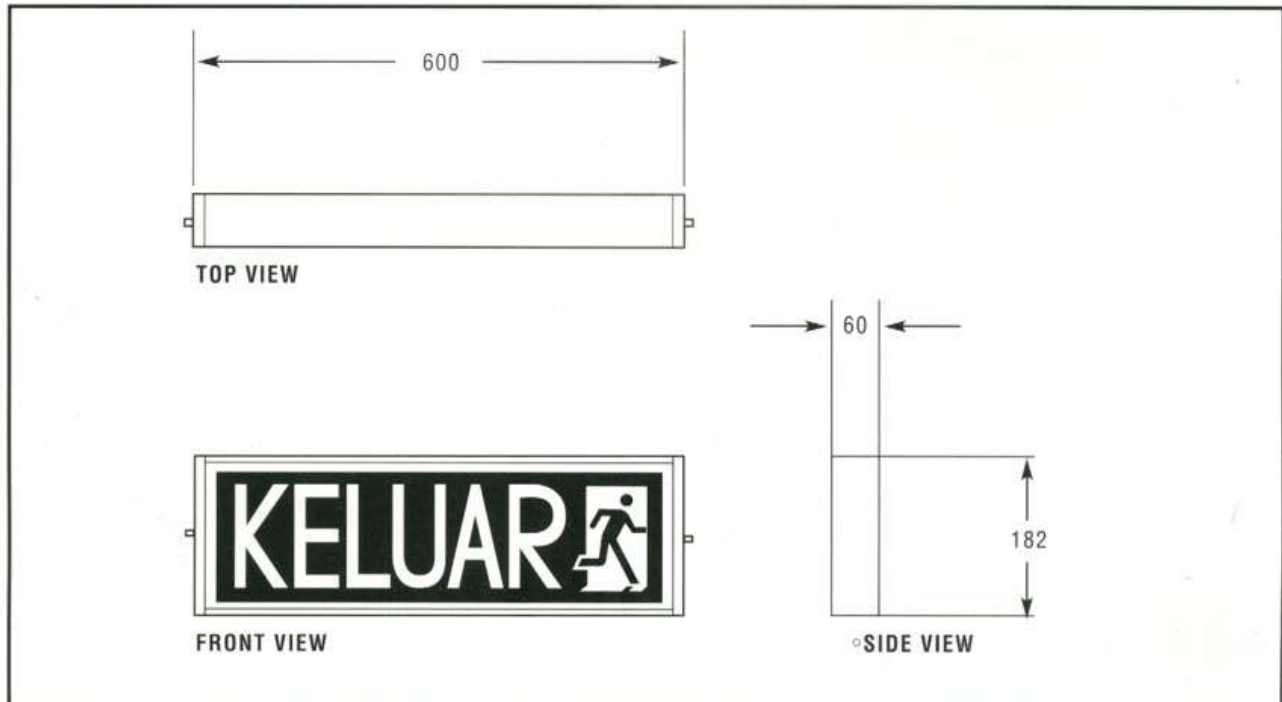

Ordering Guide

Model	PEX - 215 (2x15W)	PEX - 215F (2x8W)	PEX - 215 (LED)	LEGEND
Normal (Standard)	PEX - 215	PEX - 215F	PEX - 215LED	
Single-side Arrow To Right	PEX - 215 - RA	PEX - 215F / RA	PEX - 215LED / RA	
Single-side Arrow To Left	PEX - 215 - LA	PEX - 215F / LA	PEX - 215LED / LA	
Single-side Arrow Straight Ahead	PEX - 215 - SA	PEX - 215F / SA	PEX - 215LED / SA	
Double-side with Arrow	PEX - 215 - D	PEX - 215F / D	NOT AVAILABLE	

For further enquiries, please contact:

PNE SYSTEMS SDN. BHD. (263861 D)

No. 3, Jalan SS26/13,
Taman Mayang Jaya, 47301 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.

Tel : 03-7803 7488 (Hunting)

Fax : 03-7803 8509

E-mail : pnesys@po.jaring.my



Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.