



**PEJ-108**  
**PEJ-108 WP**


## Self-Contained Emergency Luminaire

1 x 8w Self-Contained Emergency  
Fluorescent Luminaire



### Specifications

MODEL	PEJ-108 / PEJ-108WP
MODE	Non-maintained
WEIGHT	0.4 kg
BATTERY	High temperature rated sealed Ni-Cad
HOUSING	Injection Moulded UV Stabilized Polycarbonate Diffuser And Base
CHARGER	Constant current
MOUNTING	Surface mounting direct to wall or ceiling
DIMENSION	343 L x 118 W x 30H (mm)
MONITORING	Red L.E.D. " ON " indicates charging
	Equipped with momentary switch to simulate power failure
COMPLIANCE	SIRIM MS 619: Part 102: Sect.102.22: 1985 (P)
	MS IEC 60598-1:2003
LIGHT SOURCE	1 X 8W Fluorescent tube
INPUT VOLTAGE	240V / 50Hz
RECHARGE PERIOD	16 - 24 hours
BACK-UP DURATION	3 hours
BATTERY PROTECTION	Low voltage cut-off to prevent battery from over discharging
POWER CONSUMPTION	<10 VA
DEGREE OF PROTECTION	IP-20 / IP-54
OPERATING TEMPERATURE	0°C to 65°C

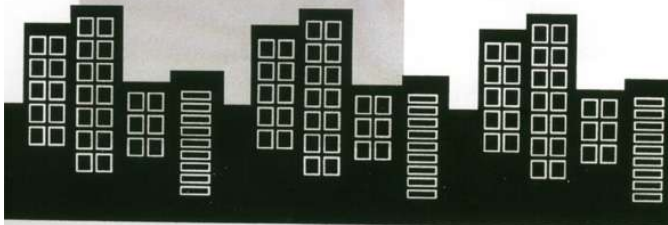

For further enquiries, please contact:-

**PNE SYSTEMS SDN .BHD.** (263861D)

No.3,Jln SS26/13, Tmn Mayang Jaya  
47301, Petaling Jaya, Selangor D.E.  
Malaysia.

Tel: 603-78037488 (Hunting)

Fax: 603-78038509

E-mail: sales@ pnesys.com.my

Website: www.pnesys.com.my